


## The all-rounder now has sound attenuation

Hawa Porta Acoustics Hawa Porta Pocket Acoustics

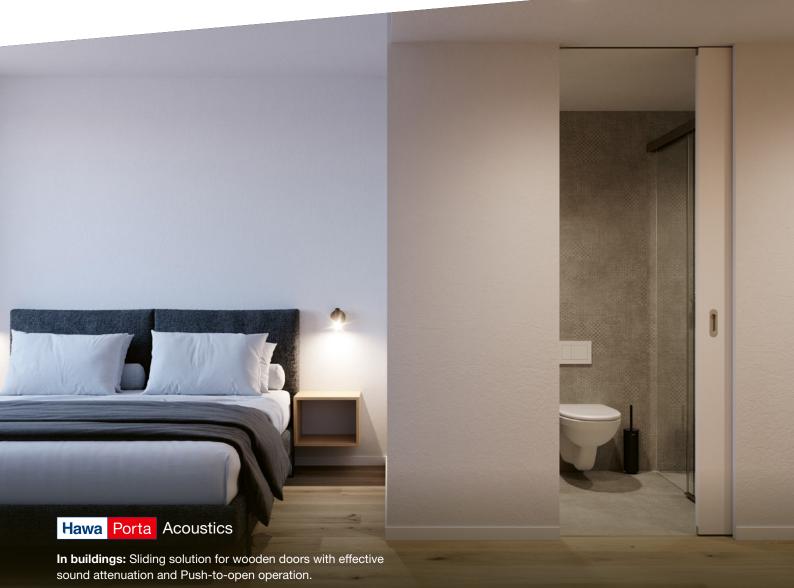

## Hawa Porta Acoustics More peace and quiet in everyday life

The all-rounder among sliding fittings can now do even more: the Hawa Porta Acoustics attenuates sound transmission by up to 39 dB. And a clever all-round seal protects against drafts, odors and incident light. Of course, it still features its signature strengths.

With minimal installation dimensions, it can be quickly and easily mounted in pockets or in front of the wall. Push-to-open operation with soft closing mechanism ensures outstanding operating convenience. The intelligent force deflection of the horizontal seal ensures quiet opening and closing as well. What's more, the Hawa Porta Acoustics features an attractive design: The entire technology, including sound attenuation, remains invisible.



Create flexible quiet zones – simply leave noise, light, drafts, and odours outside the door.



## Added discretion: All-round seals ensure quiet

When you've heard enough from the world, simply close your Hawa Porta Acoustics sliding door. Sound, odors, drafts and light – all stay outside.



## More convenience: with force deflection and push-to-open

A light tap easily releases the doors from the wall pocket, thanks to Push-to-open operation with soft closing mechanism. The intelligent force deflection of the horizontal seal additionally supports opening and closing.

## Improved efficiency: from planning to installation

The identical seal set supplements the system components of the Hawa Porta 60/100 HMD/HMT for wall-mounted and pocket solutions. Door installation is easy: You can use standard door leaves, install the doors even after construction is complete, and have access to the hardware at all times.

## The advantages of sliding doors combined with effective sound attenuation

#### The Hawa Porta Acoustics in brief



#### Flexibility

Wall-mounted and pocket solution with identical set Allows variable passage dimensions



#### Comfort

Noise reduction up to 39 dB Rw from room to room

Minimizes odors, drafts, and incidence of light

Ergonomic opening and closing of door

Increased discretion

Efficient movement support with Push-to-open with self closing mechanism for the Hawa Porta 100 HMT Acoustics



#### Security

System tested to 100,000 cycles, corresponding to approx. 25 years and the average service life of a sliding door

Meets standard according to DIN EN 1527



#### Productivity

Simple planning thanks to the Hawa Product Planner

Efficient installation with only minimal additional processing of the door leaf

$\langle$	0	>
`	$ \ge $	·

#### Aesthetics

Slimline, discreet design

Technology integrated invisibly in the running track

#### **Technical product information**

On the following pages, you will find all the necessary ordering information for Hawa Porta Acoustics.




#### Fitting for top-running wooden doors up to 60 kg (132 lbs.), with surface mounted running track. Sound attenuation. Wall mounting. Minimal installation height.

Prod	luct highlights		
Ŀ	Comfort	Outstanding living comfort thanks to effective exclusion of sound, drafts, odors and unwanted light incidence	
$\langle \rangle$	Flexibility	Aluminium panel or customer-provided wooden panelling integrated in the system	
11	Productivity	Tool-less door mounting	
Tech	nical specifica	itions	
$\triangle$	Max.	60 kg (132 lbs.)	
$\stackrel{\wedge}{\downarrow}$	Max.	2500 mm (8' 2 7/16'')	
$\leftrightarrow$	750–150	00 mm (2' 5 17/32'' to 4' 11 1/16'') Inside clearance (LMB)	
→∏←		39–45 mm (1 17/32'' to 1 25/32'')	

#### Installation examples

 $\rightarrow [] \leftarrow$ 

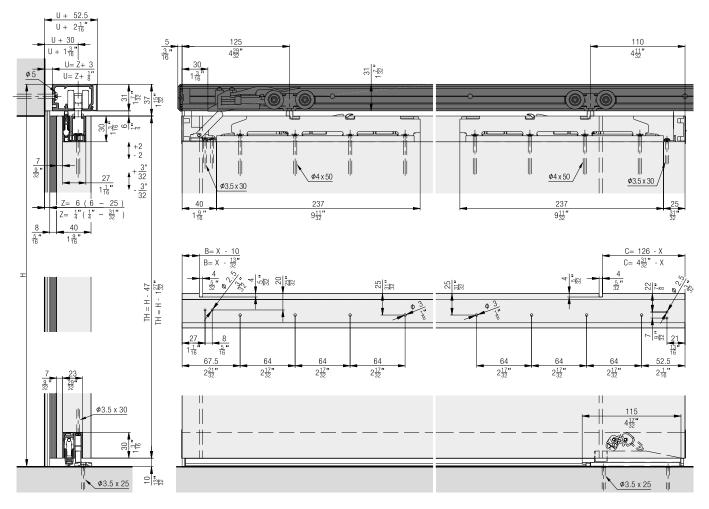

#### Set for 1 wooden door up to 60 kg (132 lbs.)

			No.
Hawa Porta 60 I for 1 door		30431	
Set consisting	30431	No.	
ESTO	Running gear, plain bearings, rollers, plastic, blue	2	057.3115.071
	SoftStop Hawa Porta Acoustics, with retention spring, plastic, gray	1	30472
and a second sec	Stopper, with retention spring, plastic, gray	1	057.3073.072
Ċ)	Adapter for running gear, for SoftStop, plastic, gray	1	30218
24	Pan head screw, M3x8 mm (1/8"x5/16")	1	30359
<u>g</u>	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated		042.0165.101
<u></u>	Head cap screw, M8x35 mm (5/16"x1 3/8"), steel, zinc-plated		042.0175.001
	Cover cap, plastic, grey	1	600.0000.533
<b>NATIONAL</b>	Running gear holder, plastic, anthracite	2	042.0174.001
	Housing steel zinc-plated		042.0166.102
CALL STREET, S	Spacer, housing plastic anthracite		30361
	Cover cap set, plastic, anthracite, 4-piece set		30484
SI S	Flat countersunk head chipboard screw, 4x50 mm (5/32"x1 31/32", steel, zinc-plated	8	30463

#### **Running tracks**

		mm (inch)	No.
		2,500 (8' 2 7/16'')	057.3112.250
	Running track, aluminum, anodized,	3,500 (11' 5 25/32'')	057.3112.350
	pre-drilled	6,000 (19' 8 7/32'')	057.3112.600
		cut to size	057.3112.990
1 111.	Running track, extended spacing	2,500 (8' 2 7/16'')	30617
	of +9 mm (11/32") between door and wall, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32'')	30618
		cut to size	30668
	Running track, extended spacing		30619
	of +20 mm (25/32") between door and wall, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32'')	30620
*#		cut to size	30669
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 '')	057.3098.001
		cut to size	057.3098.990

#### **Components for running tracks**

	No.
 Track cleaner, plastic, blue	057.3099.071
Key for dismounting, steel, zinc-plated	042.3119.101

#### Panels

	mm (inch)	No.
Clip-on panel, wall mounting, aluminum, anodized	2,500 (8' 2 7/16'')	057.3113.250
	<b>3,500</b> (11' 5 25/32'')	057.3113.350
	6,000 (19' 8 7/32'')	057.3113.600
	cut to size	057.3113.990

### Panel end component set, 95 mm (3 3/4"), can be shortened, plastic, wall mounting

			No.
Panel end component set, with fixation clip, 95 mm (3 3/4"), plastic, anthracite			30485
Set consisting of:			No.
	Panel end component, 95 mm (3 3/4"), plastic, anthracite, can be shortened	2	30133
A	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Г

#### Sets left type (horizontal seal set)

		No.
	Seal, Hawa Acoustics XS, left	30437
	Seal, Hawa Acoustics S, left	30439
////	Seal, Hawa Acoustics M, left	30441
	Seal, Hawa Acoustics L, left	30443
	Seal, Hawa Acoustics XL, left	30445
	Seal, Hawa Acoustics XXL, left	31482
	Seal, Hawa Acoustics XXXL, left	31484

#### Vertical seal for seal set, left, right set type


	No.
Seal vertical, Hawa Acoustics, 7700 mm (25' 3 5/32''), silicone, black	30300

#### Sets right type (horizontal seal set)

		No.
	Seal, Hawa Acoustics XS, right	30436
	Seal, Hawa Acoustics S, right	30438
	Seal, Hawa Acoustics M, right	30440
	Seal, Hawa Acoustics L, right	30442
	Seal, Hawa Acoustics XL, right	30444
	Seal, Hawa Acoustics XXL, right	31481
	Seal, Hawa Acoustics XXXL, right	31483


#### Hawa Acoustics horizontal seal set consisting of:




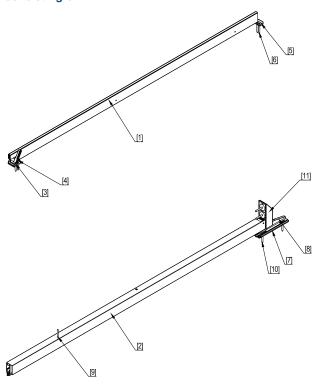

Position Position Position	<b>Bezeichnung</b> Désignation Designation	Anzahl Numéro Number	<b>Тур</b> Туре Туре			
1	Hubdichtung Joint de levage Header seal	1	Links/Rechts Gauche/Droite Left/Right			
			XS	30454	1	
			S	30385	1	
			М	30455		
			L	30456		
			XL	30457	1	
			XXL	31568		
			XXXL	31571		
2	Senkdichtung Joint d'abaissement Floor seal	1	Links Gauche Left	Rechts Droite Right		
			XS	30446	XS	30447
			S	30387	S	30383
			М	30448	м	30449
			L	30450	L	30451
			XL	30452	XL	30453
			XXL	31569	XXL	31572
			XXXL	31570	XXXL	31573
3, 4, 5, 6	Kleinteileset oben Kit pour petites pièces, supérieur Small parts set top	1	Links Gauche Left	30390	Rechts Droite Right	30392
7, 8, 9, 10	Kleinteileset unten Kit pour petites pièces, inférieur Small parts set bottom	1	Links Gauche Left	30416	Rechts Droite Right	30417
11	Pocketadapter Adaptateur pour caisson à galandage Pocket adapter	1	Links/Rechts Gauche/Droite Left/Right	30418		

#### Definition left, right / door width calculation

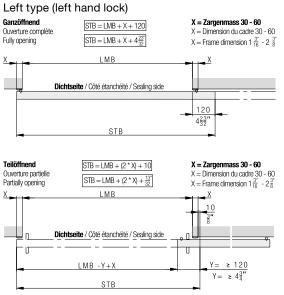

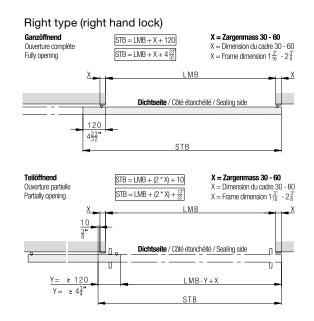

#### Acoustics set determination

#### Ganzöffnend

Ouverture complète Fully opening

	LMB				
Х	30	40	50	60	
Hawa Acoustics XS	750 - 780	750 - 770	750 -760	750	
Hawa Acoustics S	780 - 900	770 - 890	760 - 880	750 - 870	
Hawa Acoustics M	900 - 1030	890 - 1020	880 - 1010	870 - 1000	
Hawa Acoustics L	1030 - 1150	1020 -1140	1010 - 1130	1000 - 1120	
Hawa Acoustics XL	1150 - 1280	1140 - 1270	1130 - 1260	1120 - 1250	
Hawa Acoustics XXL	1280 - 1400	1270 - 1390	1260 - 1380	1250 - 1370	
Hawa Acoustics XXXL	1400 - 1500	1390 - 1500	1380 - 1500	1370 - 1500	

		LMB						
х	1 3"	1 <sup>9'</sup>	1 31"	2 <sup>3</sup> / <sub>8</sub>				
Hawa Acoustics XS	$2'5 \frac{17'}{32} - 2'6 \frac{23'}{32}$	$2'5 \frac{17'}{32} - 2'6 \frac{5'}{16}$	$2'5 \frac{17''}{32} - 2'5 \frac{29''}{32}$	2'5 <sup>17''</sup> / <sub>32</sub>				
Hawa Acoustics S	2'6 $\frac{23''}{32}$ -2'11 $\frac{7''}{16}$	2'6 5'' - 2'11 1''	$2'5 \frac{29''}{32} - 2'10 \frac{21''}{32}$	2'5 <sup>17'</sup> / <sub>32</sub> -2'10 <sup>1</sup> / <sub>4</sub>				
Hawa Acoustics M	$2'11 \frac{7''}{16} - 3'4 \frac{9''}{16}$	$2'11 \frac{1}{32} - 3'4 \frac{5'}{32}$	2'10 $\frac{21''}{32}$ - 3'3 $\frac{3''}{4}$	2'10 $\frac{1''}{4}$ - 3'3 $\frac{3''}{8}$				
Hawa Acoustics L		$3'4 \frac{5''}{32} - 3'8 \frac{7''}{8}$						
Hawa Acoustics XL	$3'9 \frac{9'}{32} - 4'2 \frac{13'}{32}$	3'8 7" -4'2	$3'8 \frac{1}{2}' - 4'1 \frac{19'}{32}$	3'8 $\frac{3''}{32}$ -4'1 $\frac{7''}{32}$				
Hawa Acoustics XXL	4'2 $\frac{13"}{32}$ -4'7 $\frac{1"}{8}$	4'2 -4'6 23"	4'1 $\frac{19"}{32}$ -4'6 $\frac{11"}{32}$	4' 1 $\frac{7''}{32}$ - 4' 5 $\frac{15'}{16}$				
Hawa Acoustics XXXL	4'7 $\frac{1''}{8}$ - 4'11 $\frac{1''}{16}$	4' 6 $\frac{23'}{32}$ - 4'11 $\frac{1''}{16}$	4'6 11 -4'11 1"	4'5 15'' -4'1111''				


#### Teilöffnend Ouverture partielle Partially opening

	LMB						
Х	30	40	50	60			
Hawa Acoustics XS	750 - 870	750 - 850	750 - 830	750 - 810			
Hawa Acoustics S	870 - 990	850 - 970	830 - 950	810 - 930			
Hawa Acoustics M	990 - 1120	970 - 1100	950 - 1080	930 - 1060			
Hawa Acoustics L	1120 - 1240	1100 - 1220	1080 - 1200	1060 - 1180			
Hawa Acoustics XL	1240 - 1370	1220 - 1350	1200 - 1330	1180 - 1310			
Hawa Acoustics XXL	1370 - 1490	1350 - 1470	1330 - 1450	1310 - 1430			
Hawa Acoustics XXXL	1490 - 1500	1470 - 1500	1450 - 1500	1430 - 1500			

		LMB								
х	1 3"	1 <del>9</del> '	$1\frac{31}{32}$	2 <sup>3</sup> / <sub>8</sub>						
Hawa Acoustics XS	2'5 17" -2'10 1	2' 5 17" - 2' 9 15"	2' 5 17" - 2' 8 11"	$2'5 \frac{17''}{32} - 2'7 \frac{7''}{8}$						
Hawa Acoustics S	2'10 $\frac{1''}{4}$ - 3'2 $\frac{31''}{32}$	$2'9 \frac{15''}{32} - 3'2 \frac{3''}{16}$	2'8 $\frac{11''}{16}$ -3'1 $\frac{13''}{32}$	$2'7 \frac{7''}{8} - 3' \frac{5''}{8}$						
Hawa Acoustics M	$3'2 \frac{31''}{32} - 3'8 \frac{3''}{32}$	$3'2 \frac{3''}{16} - 3'7 \frac{5''}{16}$	$3' 1 \frac{13''}{32} - 3' 6 \frac{17''}{32}$	3' $\frac{5''}{8}$ - 3' 5 $\frac{23'}{32}$						
Hawa Acoustics L		$3'7 \frac{5''}{16} - 4' \frac{1''}{32}$	3'6 $\frac{17''}{32}$ -3'11 $\frac{1''}{4}$	3' 5 $\frac{23'}{32}$ - 3'10 $\frac{15'}{32}$						
Hawa Acoustics XL	4' 13" - 4' 5 15"	4' $\frac{1}{32}$ - 4' 5 $\frac{5}{32}$	3'11 $\frac{1}{4}$ - 4' 1 $\frac{7}{32}$	$3'10 \frac{15'}{32} - 4'3 \frac{9'}{16}$						
Hawa Acoustics XXL	4' 5 15' - 4'10 21'	4' 5 $\frac{5''}{32}$ - 4' 9 $\frac{7''}{8}$	3'6 $\frac{17''}{32}$ -3'11 $\frac{1''}{4}$	4' 3 $\frac{9''}{16}$ - 4' 8 $\frac{5''}{16}$						
Hawa Acoustics XXXL	4'10 21" - 4'11 1"	4'9 7" -4'11 1"	4'9 $\frac{3''}{32}$ -4'11 $\frac{1''}{16}$	4'8 5" -4'11-1"						

#### Hawa Porta 60 HMD Acoustics

Partially opening view

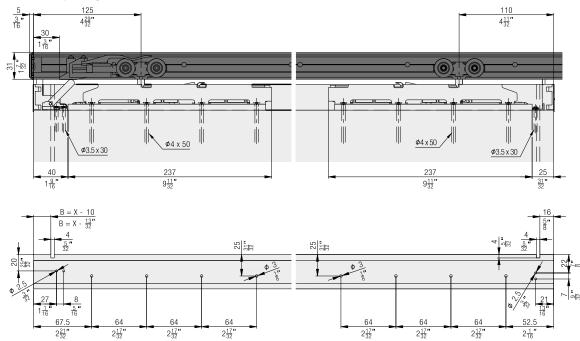



#### Bottom guide assembly detail


 $2\frac{21}{32}$ 


Ganzöffnend Ouverture complète Fully opening



 $2\frac{17}{32}$ 

 $2\frac{17}{32}$ 






**Calculations of panels** 


 $2\frac{17}{32}$ 

 $2\frac{17}{32}$ 

 $2\frac{1}{16}$ 

 $2\frac{17}{32}$ 





Subject to technical modifications. Metric specifications are exact. Inches are approximate.


## Fitting for top-running wooden doors up to 60 kg (132 lbs.), with surface mounted running track or running track flush with the ceiling. Sound attenuation. Ceiling mounting. Wall pocket solution.

#### **Product highlights**


Ŷ	Comfort	Outstanding living comfort thanks to effective exclusion of sound, drafts, odors and unwanted light incidence
${\longleftrightarrow}$	Flexibility	Ceiling-integrated or surface-mounted pocket solutions possible
	Productivity	Door can be installed in pocket after construction is complete

#### **Technical specifications**

$\widehat{\mathbb{N}}$	Max.	60 kg (132 lbs.)
$\mathop{\uparrow}_{\downarrow}$	Max.	2500 mm (8' 2 7/16'')
$\leftarrow \rightarrow$		750–1500 mm (2' 5 17/32'' to 4' 11 1/16'') Inside clearance (LMB)
→[]←		39–45 mm (1 17/32'' to 1 25/32'')

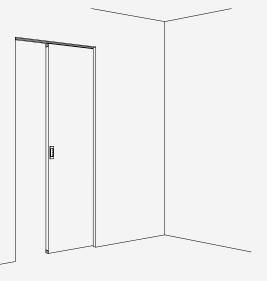

#### Installation examples

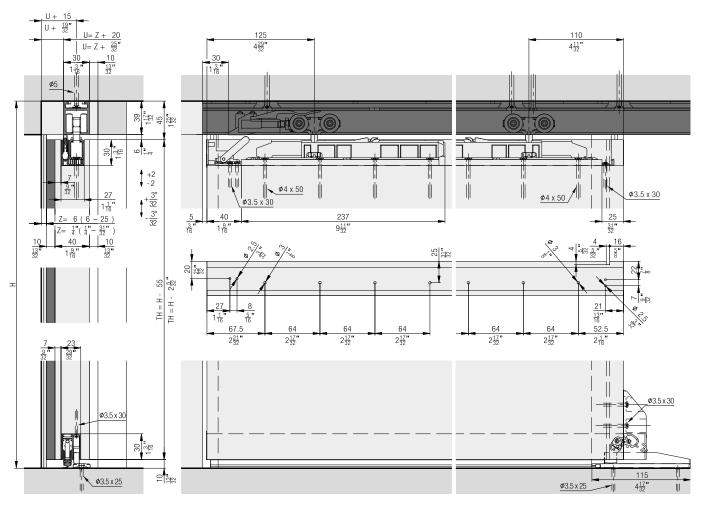

#### Set for 1 wooden door up to 60 kg (132 lbs.)

A	١cc	ess	ori	es	for	set

			No.		1		No.	
Hawa Porta 60 for 1 door	HMD/HMT Pocket Acoustics,		30431		Spring loaded buffer Hawa Porta 60/100		27760	
		-	No.	Running tracks	5			
et consisting	g of:	30431				mm (inch)	No.	
ESTO	Running gear, plain bearings, rollers, plastic, blue	2	057.3115.071			1,700 (5' 6 15/16'')	057.3016.17	
	SoftStop Hawa Porta Acoustics, with retention	1	30472	~	Running track, aluminum, anodized, - pre-drilled	2,000 (6' 6 3/4 '') 2,500	057.3016.20	
	spring, plastic, gray			Ŷ.		(8' 2 7/16'') 6,000		
A Ser	Stopper, with retention spring, plastic, gray	1	057.3073.072			(19' 8 7/32'') cut to	057.3016.60	
Ê	Adapter for running gear, for SoftStop, plastic, gray	1	30218			size 2,000 (6' 6 3/4 '')	057.3016.20	
				/•//		2,500 (8' 2 7/16'')	057.3016.2	
212	Pan head screw, M3x8 mm (1/8"x5/16")	1	30359			6,000 (19' 8 7/32'')	057.3016.6	
Ø	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	1	042.0165.101				cut to size	057.3016.99
<b>I</b>	Head cap screw, M8x35 mm (5/16"x1 3/8"), steel, zinc-plated	1	042.0175.001		Disposable cover to running track Hawa Divido 100 / Hawa Porta	2,000 (6' 6 3/4 '') cut to	057.3098.0	
	Cover cap, plastic, grey	1	600.0000.533		45/60/100, plastic, black	size	057.3098.99	
	Running gear holder, plastic,	2	042.0174.001	Components fo	or running tracks			
Jul .	anthracite		042.0114.001				No.	
	Housing, steel, zinc-plated	2	042.0166.102	so the second se	Track cleaner, plastic, l	olue	057.3099.07	
ALL STREET, ST	Spacer, housing plastic anthracite	2	30361		Key for dismounting, si zinc-plated	teel,	042.3119.10	
	Cover cap set, plastic, plastic, anthracite, 4-piece set	1	30484		·			
	Flat countersunk head chipboard screw, 4x50 mm (5/32"x1 31/32", steel, zinc-plated	8	30463					

#### Assembly set

						No.
Assembly set Ha 2000 mm (6' 6 3	057.3179.200					
	Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16'')					
	Assembly set Hawa Porta 60/100, 3000 mm (9' 10 1/8'')					
Set consisting	mm (inch)	057.3179.200	057.3179.250	057.3179.300	No.	
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 '')	1			057.3174.200
	Assembly p plastic, gra		9	11	13	057.0201.001
El S	Countersur screw, 5x40 (3/16"x1 9/1 steel, zinc-	) mm 16"),	10	12	14	766.3054.140
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16'')		1		057.3174.250
	Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8 '')			1	057.3174.300

#### Sets left type (horizontal seal set)

		No.
	Seal, Hawa Acoustics XS, left	30437
	Seal, Hawa Acoustics S, left	30439
////	Seal, Hawa Acoustics M, left	30441
	Seal, Hawa Acoustics L, left	30443
	Seal, Hawa Acoustics XL, left	30445
	Seal, Hawa Acoustics XXL, left	31482
	Seal, Hawa Acoustics XXXL, left	31484

#### Vertical seal for seal set, left, right set type


		No.
	Seal vertical, Hawa Acoustics, 7700 mm (25' 3 5/32''), silicone, black	30300

#### Sets right type (horizontal seal set)

		No.
	Seal, Hawa Acoustics XS, right	30436
	Seal, Hawa Acoustics S, right	30438
	Seal, Hawa Acoustics M, right	30440
	Seal, Hawa Acoustics L, right	30442
	Seal, Hawa Acoustics XL, right	30444
	Seal, Hawa Acoustics XXL, right	31481
	Seal, Hawa Acoustics XXXL, right	31483


#### Hawa Acoustics horizontal seal set


consisting of:

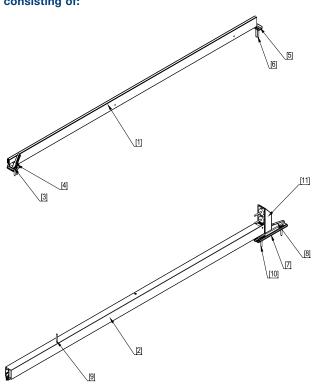

Position Position Position	Bezeichnung Désignation Designation	Anzahl Numéro Number	<b>Тур</b> Туре Туре			
1	Hubdichtung Joint de levage Header seal	1	Links/Rechts Gauche/Droite Left/Right			
			XS	30454		
			S	30385		
			М	30455		
			L	30456		
			XL	30457		
			XXL	31568		
			XXXL	31571		
2	Senkdichtung Joint d'abaissement Floor seal	1	Links Gauche Left		Rechts Droite Right	
			XS	30446	XS	30447
			S	30387	S	30383
			М	30448	М	30449
			L	30450	L	30451
			XL	30452	XL	30453
			XXL	31569	XXL	31572
			XXXL	31570	XXXL	31573
3, 4, 5, 6	Kleinteileset oben Kit pour petites pièces, supérieur Small parts set top	1	Links Gauche Left	30390	Rechts Droite Right	30392
7, 8, 9, 10	Kleinteileset unten Kit pour petites pièces, inférieur Small parts set bottom	1	Links Gauche Left	30416	Rechts Droite Right	30417
11	Pocketadapter Adaptateur pour caisson à galandage Pocket adapter	1	Links/Rechts Gauche/Droite Left/Right	30418		

#### Definition left, right / door width calculation

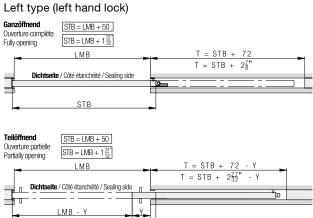

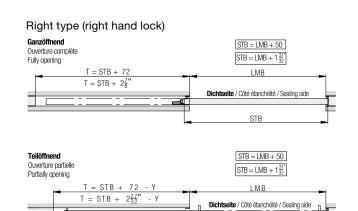

U

LMB - Y

STB

Y,

#### Acoustics set determination


STB

	LMB
Hawa Acoustics XS	750 - 850
Hawa Acoustics S	850 - 970
Hawa Acoustics M	970 - 1100
Hawa Acoustics L	1100 - 1220
Hawa Acoustics XL	1220 - 1350
Hawa Acoustics XXL	1350 - 1470
Hawa Acoustics XXXL	1470 - 1500


	LMB		
Hawa Acoustics XS	2'5 17" -2'9 15"		
Hawa Acoustics S	$2'9 \frac{15''}{32} - 3'2 \frac{3''}{16}$		
Hawa Acoustics M	3'2 3' - 3'7 5'		
Hawa Acoustics L	3'7 5" -4' 1"		
Hawa Acoustics XL	4' $\frac{1''}{32}$ - 4' 5 $\frac{5''}{32}$		
Hawa Acoustics XXL	4'5 5/32 -4'9 7/8		
Hawa Acoustics XXXL	4'9 <sup>7</sup> ' - 4'11 <sup>1</sup> '		


#### Further installation examples

đ

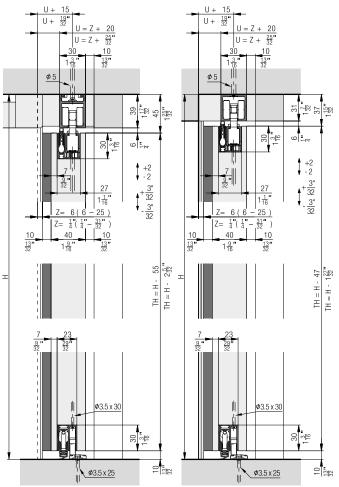


#### Pocket side view, assembly set

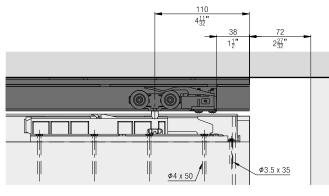

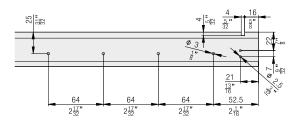





#### Details of end post at lock side




#### Assembly set/track installation Pocket

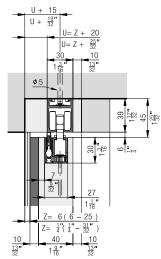




#### Spring stop

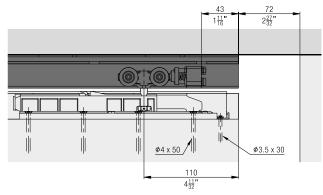

Bottom guide assembly detail




### Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. Sound attenuation. Wall mounting. Minimal installation height.

#### Product highlights


<u>لي</u>	Comfort	Outstanding living comfort thanks to effective exclusion of sound, drafts, odors and unwanted light incidence
${\longleftrightarrow}$	Flexibility	Aluminium panel or customer-provided wooden panelling integrated in the system
	Productivity	Tool-less door mounting

#### **Technical specifications**

$\triangle$	Max.	100 kg (220 lbs.)
$\stackrel{\wedge}{\downarrow}$	Max.	2500 mm (8' 2 7/16'')
$\stackrel{\leftarrow}{=}$		750–1500 mm (2' 5 17/32'' to 4' 11 1/16'') Inside clearance (LMB)
→[]←		39–45 mm (1 17/32'' to 1 25/32'')

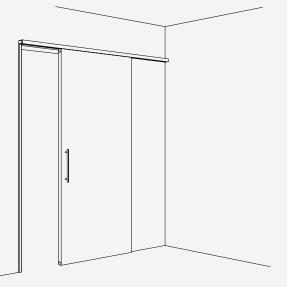

#### Installation examples

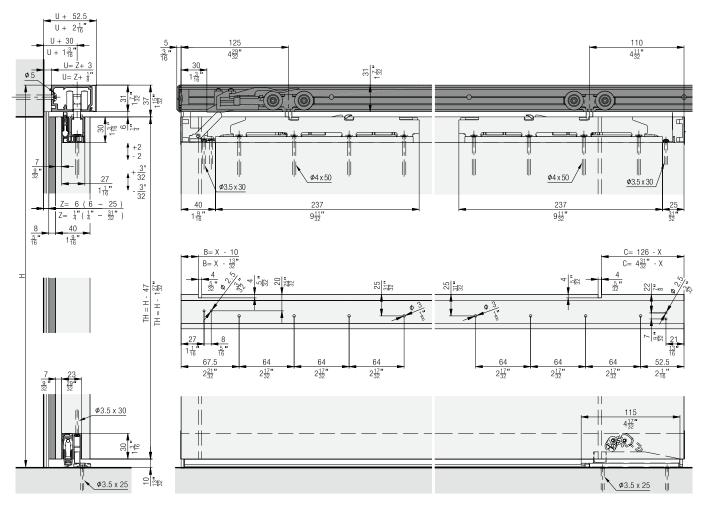

#### Set for 1 wooden door up to 100 kg (220 lbs.)

		No.	
Hawa Porta 100 for 1 door	HMD/HMT Pocket Acoustics,		30430
Set consisting	Set consisting of:		
EFO	Running gear, ball bearing, rollers, plastic, white	2	057.3114.071
	SoftStop Hawa Porta Acoustics, with retention spring, plastic, gray	1	30472
Carl Carl	Stopper, with retention spring, plastic, gray	1	057.3073.072
Ċ.	Adapter for running gear, for SoftStop, plastic, gray	1	30218
El S	Pan head screw, M3x8 mm (1/8"x5/16")	1	30359
<b>S</b>	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated		042.0165.101
<b></b>	Head cap screw, M8x35 mm (5/16"x1 3/8"), steel, zinc-plated		042.0175.001
Ø	Cover cap, plastic, grey	1	600.0000.533
Juli II	Running gear holder, plastic, anthracite	2	042.0174.001
	Housing, steel, zinc-plated		042.0166.102
A STREET STREET	Spacer, housing plastic anthracite		30361
	Cover cap set, plastic, anthracite, 4-piece set		30484
S.	Flat countersunk head chipboard screw, 4x50 mm (5/32"x1 31/32", steel, zinc-plated	8	30463

#### **Running tracks**

		mm (inch)	No.
	Running track,	2,500 (8' 2 7/16'')	057.3112.250
		3,500 (11' 5 25/32'')	057.3112.350
	aluminum, anodized, pre-drilled	6,000 (19' 8 7/32'')	057.3112.600
		cut to size	057.3112.990
/ ///,	Running track, extended spacing	2,500 (8' 2 7/16'')	30617
	of +9 mm (11/32'') between door and wall, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32'')	30618
		cut to size	30668
	Running track, extended spacing	2,500 (8' 2 7/16'')	30619
	of +20 mm (25/32") between door and wall, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32'')	30620
		cut to size	30669
	Disposable cover to running track Hawa	2,000 (6' 6 3/4 '')	057.3098.001
Divido 100 / Hawa Porta 45/60/100, plastic, black	cut to size	057.3098.990	

#### **Components for running tracks**

		No.
50	Track cleaner, plastic, blue	057.3099.071
	Key for dismounting, steel, zinc-plated	042.3119.101

#### Panels

		mm (inch)	No.
Ţ	Clip-on panel, wall mounting, aluminum, anodized	2,500 (8' 2 7/16'')	057.3113.250
		<b>3,500</b> (11' 5 25/32'')	057.3113.350
		6,000 (19' 8 7/32'')	057.3113.600
		cut to size	057.3113.990

### Panel end component set, 95 mm (3 3/4"), can be shortened,, plastic, wall mounting

			No.
Panel end component set, with fixation clip, 95 mm (3 3/4"), plastic, anthracite			30485
Set consisting of:		30485	No.
	Panel end component, 95 mm (3 3/4"), plastic, anthracite, can be shortened	2	30133
di	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

#### Sets left type (horizontal seal set)

#### Sets right type (horizontal seal set)

		No.
	Seal, Hawa Acoustics XS, left	30437
	Seal, Hawa Acoustics S, left	30439
	Seal, Hawa Acoustics M, left	30441
	Seal, Hawa Acoustics L, left	30443
	Seal, Hawa Acoustics XL, left	30445
	Seal, Hawa Acoustics XXL, left	31482
	Seal, Hawa Acoustics XXXL, left	31484


#### Vertical seal for seal set, left, right set type

	No.
Seal vertical, Hawa Acoustics, 7700 mm (25' 3 5/32''), silicone, black	30300

# No.Seal, Hawa Acoustics XS, right30436Seal, Hawa Acoustics S, right30438Seal, Hawa Acoustics M, right30440Seal, Hawa Acoustics L, right30442Seal, Hawa Acoustics XL, right30444Seal, Hawa Acoustics XXL, right31481Seal, Hawa Acoustics XXXL, right31483

#### Hawa Acoustics horizontal seal set

consisting of:

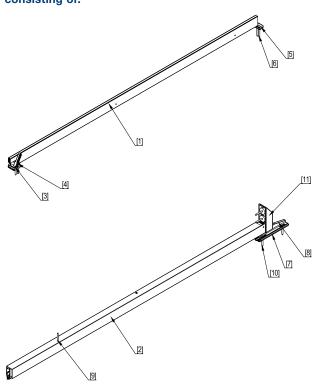

Position Position Position	Bezeichnung Désignation Designation	Anzahl Numéro Number	<b>Тур</b> Туре Туре			
1	Hubdichtung Joint de levage Header seal	1	Links/Rechts Gauche/Droite Left/Right			
			XS	30454	1	
			S	30385	1	
			М	30455	1	
			L	30456	1	
			XL	30457	1	
			XXL	31568	1	
			XXXL	31571	1	
2	Senkdichtung Joint d'abaissement Floor seal	1	Links Gauche Left		Rechts Droite Right	
			XS	30446	XS	30447
			S	30387	S	30383
			М	30448	М	30449
			L	30450	L	30451
			XL	30452	XL	30453
			XXL	31569	XXL	31572
			XXXL	31570	XXXL	31573
3, 4, 5, 6	Kleinteileset oben Kit pour petites pièces, supérieur Small parts set top	1	Links Gauche Left	30390	Rechts Droite Right	30392
7, 8, 9, 10	Kleinteileset unten Kit pour petites pièces, inférieur Small parts set bottom	1	Links Gauche Left	30416	Rechts Droite Right	30417
11	Pocketadapter Adaptateur pour caisson à galandage Pocket adapter	1	Links/Rechts Gauche/Droite Left/Right	30418		

LMB

Dichtseite / Côté étanchéité / Sealing side

STB

LMB

Dichtseite / Côté étanchéité / Sealing side

STB

LMB-Y+X

X = Zargenmass 30 - 60X = Dimension du cadre 30 - 60

X = Frame dimension  $1\frac{3^{"}}{16} - 2\frac{3^{"}}{8}$ 

X = Zargenmass 30 - 60

X = Dimension du cadre 30 - 60  $X = \text{Frame dimension 1} \frac{3^{"}}{16} - 2\frac{3^{"}}{8}$ 


<u>X</u>

X

П

TJ

#### Definition left, right / door width calculation

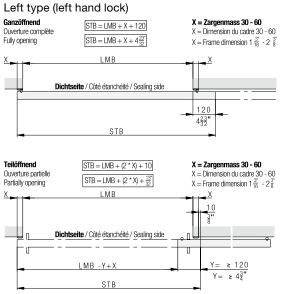

#### Acoustics set determination

#### Ganzöffnend

Ouverture complète Fully opening

	LMB							
Х	30	40	50	60				
Hawa Acoustics XS	750 - 780	750 - 770	750 -760	750				
Hawa Acoustics S	780 - 900	770 - 890	760 - 880	750 - 870				
Hawa Acoustics M	900 - 1030	890 - 1020	880 - 1010	870 - 1000				
Hawa Acoustics L	1030 - 1150	1020 -1140	1010 - 1130	1000 - 1120				
Hawa Acoustics XL	1150 - 1280	1140 - 1270	1130 - 1260	1120 - 1250				
Hawa Acoustics XXL	1280 - 1400	1270 - 1390	1260 - 1380	1250 - 1370				
Hawa Acoustics XXXL	1400 - 1500	1390 - 1500	1380 - 1500	1370 - 1500				

		LMB											
х	1 3"		1 <del>9</del> "				1 31"				2 <sup>3</sup> / <sub>8</sub>		
Hawa Acoustics XS	2'5 <sup>17'</sup> / <sub>32</sub> -2'	$6 \frac{23''}{32}$	2'5	17" 32	- 2' 6	<u>5</u> " 16	2'5	$\frac{17"}{32}$	- 2' 5	<u>29</u> " 32	2'5	17" 32	
Hawa Acoustics S	2'6 <sup>23"</sup> / <sub>32</sub> -2'	11 <u>7</u> "	2'6	$\frac{5"}{16}$	- 2'11	$\frac{1}{32}$	2'5	<u>29</u> " 32	- 2'10	$\frac{21}{32}$	2'5	$\frac{17}{32}$	- 2'10 1/4
Hawa Acoustics M	2'11 7" - 3'	4 <u>9'</u>	2'11	1" 32	- 3' 4	$\frac{5"}{32}$	2'10	21" 32	- 3' 3	$\frac{3}{4}$	2'10	$\frac{1}{4}$	-3'3 3
Hawa Acoustics L	3'4 <u>9"</u> -3'		3'4	$\frac{5^{*}}{32}$	- 3' 8	7" 8	3'3	$\frac{3''}{4}$	- 3' 8	1"	3'3	<u>8</u>	- 3' 8 3''
Hawa Acoustics XL	3'9 <u>9</u> " -4'	2 13" 32			- 4' 2		3'8	$\frac{1}{2}$	- 4' 1	19" 32	3'8		- 4' 1 7' 32
Hawa Acoustics XXL	4'2 13" -4'	7 <u>1</u> "	4'2		- 4' 6	23" 32	4'1	19" 32	- 4' 6	$\frac{11}{32}$	4'1	$\frac{7"}{32}$	- 4' 5 15
Hawa Acoustics XXXL	4'7 <u>1</u> " -4'	11 <u>1"</u> 16	4'6	$\frac{23}{32}$	- 4'11	$\frac{1^{*}}{16}$	4'6	$\frac{11}{32}$	- 4'11	$\frac{1"}{16}$	4'5	<u>15"</u> 16	-4'11 <u>1'</u>

10 3" <u>Y= ≥ 120</u>  $Y = \ge 4\frac{3}{4}$ 

Teilöffnend

Ouverture partielle Partially opening

#### Teilöffnend Ouverture partielle Partially opening

	LMB							
Х	30	40	50	60				
Hawa Acoustics XS	750 - 870	750 - 850	750 - 830	750 - 810				
Hawa Acoustics S	870 - 990	850 - 970	830 - 950	810 - 930				
Hawa Acoustics M	990 - 1120	970 - 1100	950 - 1080	930 - 1060				
Hawa Acoustics L	1120 - 1240	1100 - 1220	1080 - 1200	1060 - 1180				
Hawa Acoustics XL	1240 - 1370	1220 - 1350	1200 - 1330	1180 - 1310				
Hawa Acoustics XXL	1370 - 1490	1350 - 1470	1330 - 1450	1310 - 1430				
Hawa Acoustics XXXL	1490 - 1500	1470 - 1500	1450 - 1500	1430 - 1500				

Right type (right hand lock)

X

120

 $4\frac{23}{32}$ 

П

U

STB = LMB + X + 120

 $STB = LMB + X + 4\frac{23}{32}$ 

STB = LMB + (2 \* X) + 10


 $STB = LMB + (2 * X) + \frac{13''}{32}$ 


		LMB													
х	1.	3" 16		1 <del>9</del>				$1\frac{31}{32}$				2 <sup>3</sup> / <sub>8</sub>			
Hawa Acoustics XS	2'5 17'	- 2'10	$\frac{1}{4}$	2'5	<u>17"</u> 32	- 2' 9	15" 32	2'5	<u>17"</u> 32	- 2' 8	<u>11"</u> 16	2'5	17" 32	-2'7	$\frac{7}{8}$
Hawa Acoustics S	2'10 <u>1</u> "	- 3' 2	31" 32	2'9	15" 32	- 3' 2	$\frac{3''}{16}$	2'8	<u>11"</u> 16	- 3' 1	$\frac{13"}{32}$	2'7	$\frac{7''}{8}$	- 3'	5" 8
Hawa Acoustics M	3'2 <u>31</u> "	- 3' 8	$\frac{3}{32}$	3'2	<u>3</u> " 16	- 3' 7	5" 16	3'1	<u>13</u> " 32	- 3' 6	$\frac{17}{32}$	3'	$\frac{5^{*}}{8}$	- 3' 5	23" 32
Hawa Acoustics L	3'8 <u>3</u> "	- 4'	<u>13</u> " 16	3'7	<u>5</u> " 16	- 4'	$\frac{1}{32}$	3'6	$\frac{17''}{32}$	- 3'11	$\frac{1}{4}$	3'5	23" 32	- 3'10	) <u>15</u> " 32
Hawa Acoustics XL	4' <u>13''</u>	- 4' 5	<u>15</u> " 16	4'	$\frac{1}{32}$	- 4' 5	$\frac{5^{*}}{32}$	3'11	$\frac{1}{4}$	- 4' 1	$\frac{7^{*}}{32}$	3'10	15" 32	- 4' 3	9' 16
Hawa Acoustics XXL	4'5 15'	- 4'10	21" 32	4'5	<u>5</u> " 32	- 4' 9	<u>7</u> " 8	3'6	17" 32	- 3'11	$\frac{1}{4}$	4'3	<u>9</u> " 16	- 4' 8	$\frac{5}{16}$
Hawa Acoustics XXXL	4'10 <u>21</u> "	- 4'11	1" 16	4'9	$\frac{7"}{8}$	- 4'11	$\frac{1}{16}$	4'9	3" 32	- 4'11	$\frac{1''}{16}$	4'8	<u>5</u> " 16	- 4'1'	1 <u>-1</u> " 16




#### Hawa Porta 100 HMD Acoustics

#### Partially opening view

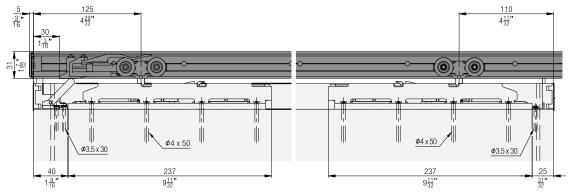

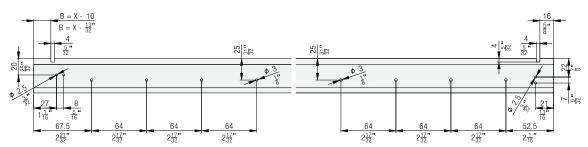


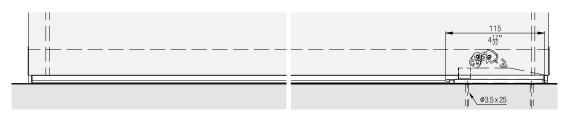


#### Bottom guide assembly detail


Ganzöffnend Ouverture complète Fully opening








#### **Calculations of panels**






## Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track or running track flush with the ceiling. Sound attenuation. Ceiling mounting. Wall pocket solution.

#### **Product highlights**


Ŷ	Comfort	Outstanding living comfort thanks to effective exclusion of sound, drafts, odors and unwanted light incidence
$\Leftrightarrow$	Flexibility	Ceiling-integrated or surface-mounted pocket solutions possible
	Productivity	Door can be installed in pocket after construction is complete

#### **Technical specifications**

$\overline{\mathbb{N}}$	Max.	100 kg (220 lbs.)
$\stackrel{\wedge}{\downarrow}$	Max.	2500 mm (8' 2 7/16'')
$\stackrel{\leftarrow}{=}$		750–1500 mm (2' 5 17/32'' to 4' 11 1/16'') Inside clearance (LMB)
→[]←		39–45 mm (1 17/32'' to 1 25/32'')

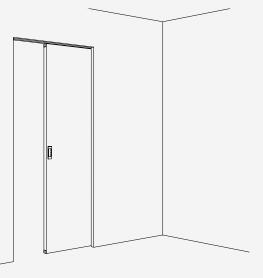

#### Installation examples

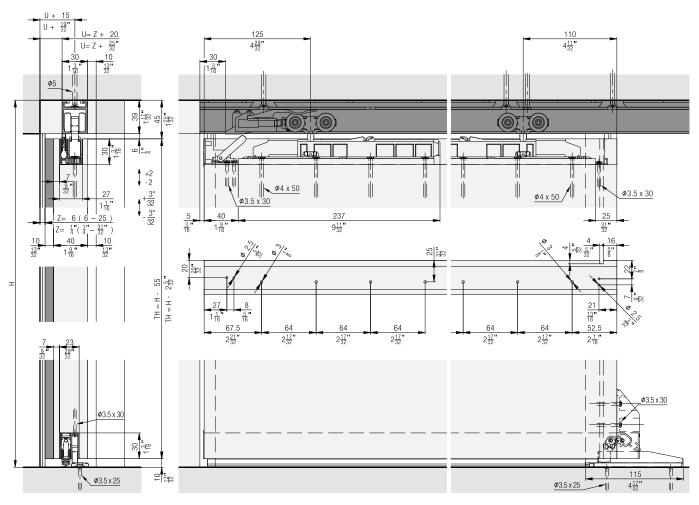

#### Set for 1 wooden door up to 100 kg (220 lbs.)

Accessories	for	set
Accession	101	001

			No.					No.
Hawa Porta 100 HMD/HMT Pocket Acoustics, for 1 door			30430			Spring loaded buffer Hawa Porta 60/100		27760
Set consisting	of	30430	No.		Running tracks	5	mm	
	Running gear, ball bearing, rollers, plastic, white	2	057.3114.071				(inch) 1,700 (5' 6 15/16'')	No. 057.3016.170
	SoftStop Hawa Porta						2,000 (6' 6 3/4 '')	057.3016.200
	Acoustics, with retention spring, plastic, gray	1	30472			Running track, aluminum, pre-drilled	2,500 (8' 2 7/16'')	057.3016.250
- Ser -	Stopper, with retention	1	057.3073.072		¥		6,000 (19' 8 7/32'')	057.3016.600
	spring, plastic, gray						cut to size	057.3016.990
E	Adapter for running gear, for SoftStop, plastic, gray	1	30218				2,000 (6' 6 3/4 '')	057.3016.201
						Running track, aluminum, anodized,	2,500 (8' 2 7/16'')	057.3016.251
No.	Pan head screw, M3x8 mm (1/8"x5/16")	1	30359		J.	pre-drilled	6,000 (19' 8 7/32'')	057.3016.601
<b>R</b>	Hexagon head screw, M8x36 mm (5/16"x1 13/32"),	1	042.0165.101	1			cut to size	057.3016.991
	steel, zinc-plated Head cap screw,				///	Disposable cover to running track	2,000 (6' 6 3/4 '')	057.3098.001
0	M8x35 mm (5/16"x1 3/8"), steel, zinc-plated	1	042.0175.001			Hawa Divido 100 / Hawa Porta 45/60/100, plastic,	cut to	057.3098.990
Ø	Cover cap, plastic, grey	1	600.0000.533			black	size	
1				1	Componente fr	r rupping trooks		

#### **Components for running tracks**

		No.
En en	Track cleaner, plastic, blue	057.3099.071
	Key for dismounting, steel, zinc-plated	042.3119.101

E.	Adapter for running gear, for SoftStop, plastic, gray	1	30218
LIS.	Pan head screw, M3x8 mm (1/8"x5/16")	1	30359
<b>B</b>	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	1	042.0165.101
<b>I</b>	Head cap screw, M8x35 mm (5/16"x1 3/8"), steel, zinc-plated	1	042.0175.001
Ø	Cover cap, plastic, grey	1	600.0000.533
ALL ALL	Running gear holder, plastic, anthracite	2	042.0174.001
	Housing, steel, zinc-plated	2	042.0166.102
CALL STREET, STREE	Spacer, housing plastic anthracite	2	30361
	Cover cap set, plastic, plastic, anthracite, 4-piece set	1	30484
	Flat countersunk head chipboard screw, 4x50 mm (5/32"x1 31/32", steel, zinc-plated	8	30463

#### Assembly set

	No.								
Assembly set H 2000 mm (6' 6 3	057.3179.200								
	Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16'')								
Assembly set H 3000 mm (9' 10		0/100,				057.3179.300			
Set consisting	of:	mm (inch)	057.3179.200	057.3179.250	057.3179.300	No.			
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 '')	1			057.3174.200			
	Assembly p plastic, gra		9	11	13	057.0201.001			
El S	Countersur screw, 5x40 (3/16"x1 9/1 steel, zinc-p	) mm 16"),	10	12	14	766.3054.140			
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16'')		1		057.3174.250			
	Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8 '')			1	057.3174.300			

Г

#### Push-to-open with self closing mechanism (must only be used with Hawa Porta 100)

			No.
Push-to-open H 40–100 kg (88 to	057.3178.071		
Set consisting	of:	057.3178.071	No.
	Push-to-open Hawa Porta 100, 40–100 kg (88 to 220 lbs.), with self-closing	1	057.3177.071
	Release piece for Push-to-open, zinc die casting	1	057.3176.001
XI.S.	Screw set soft close	1	600.0000.566

#### Sets left type (horizontal seal set)

		No.
	Seal, Hawa Acoustics XS, left	30437
	Seal, Hawa Acoustics S, left	30439
	Seal, Hawa Acoustics M, left	30441
	Seal, Hawa Acoustics L, left	30443
	Seal, Hawa Acoustics XL, left	30445
	Seal, Hawa Acoustics XXL, left	31482
	Seal, Hawa Acoustics XXXL, left	31484

#### Vertical seal for seal set, left, right set type


	No.
Seal vertical, Hawa Acoustics, 7700 mm (25' 3 5/32''), silicone, black	30300

#### Sets right type (horizontal seal set)

		No.
	Seal, Hawa Acoustics XS, right	30436
	Seal, Hawa Acoustics S, right	30438
	Seal, Hawa Acoustics M, right	30440
	Seal, Hawa Acoustics L, right	30442
	Seal, Hawa Acoustics XL, right	30444
	Seal, Hawa Acoustics XXL, right	31481
	Seal, Hawa Acoustics XXXL, right	31483


#### Hawa Acoustics horizontal seal set

consisting of:

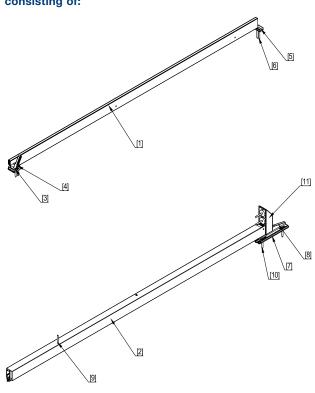


Position Position Position	Bezeichnung Désignation Designation	Anzahl Numéro Number	<b>Тур</b> Туре Туре			
1	Hubdichtung Joint de levage Header seal	1	Links/Rechts Gauche/Droite Left/Right			
			XS	30454		
			S	30385		
			М	30455		
			L	30456		
			XL	30457		
			XXL	31568		
			XXXL	31571		
2	Senkdichtung Joint d'abaissement Floor seal	1	Links Gauche Left		Rechts Droite Right	
			XS	30446	XS	30447
			S	30387	S	30383
			М	30448	М	30449
			L	30450	L	30451
			XL	30452	XL	30453
			XXL	31569	XXL	31572
			XXXL	31570	XXXL	31573
3, 4, 5, 6	Kleinteileset oben Kit pour petites pièces, supérieur Small parts set top	1	Links Gauche Left	30390	Rechts Droite Right	30392
7, 8, 9, 10	Kleinteileset unten Kit pour petites pièces, inférieur Small parts set bottom	1	Links Gauche Left	30416	Rechts Droite Right	30417
11	Pocketadapter Adaptateur pour caisson à galandage Pocket adapter	1	Links/Rechts Gauche/Droite Left/Right	30418		

#### Definition left, right / door width calculation

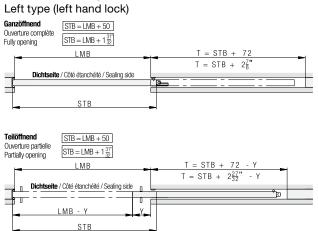

# STB = LMB + 50 Ganzöffnend Overture complète Fully opening T = STB + 72 LMB T = STB + 72 LMB T = STB + 2<sup>2</sup>/<sub>8</sub>" Dichtseite / Côté étanchéité / Sealing side STB




#### Acoustics set determination


	LMB	
Hawa Acoustics XS	750 - 850	
Hawa Acoustics S	850 - 970	
Hawa Acoustics M	970 - 1100	
Hawa Acoustics L	1100 - 1220	
Hawa Acoustics XL	1220 - 1350	
Hawa Acoustics XXL	1350 - 1470	
Hawa Acoustics XXXL	1470 - 1500	
	LMB	
Hawa Acoustics XS	2'5 <sup>17''</sup> -2'9 <sup>15''</sup>	


Hawa Acoustics XS	2'5 <sup>17''</sup> -2'9 <sup>15''</sup>
Hawa Acoustics S	$2'9 \frac{15''}{32} - 3'2 \frac{3''}{16}$
Hawa Acoustics M	3'2 3' - 3'7 5'
Hawa Acoustics L	$3'7 \frac{5''}{16} - 4' \frac{1''}{32}$
Hawa Acoustics XL	4' <u>1</u> " - 4' 5 <u>5</u> "
Hawa Acoustics XXL	$4'5 \frac{5'}{32} - 4'9 \frac{7'}{8}$
Hawa Acoustics XXXL	4'9 <sup>7</sup> / <sub>8</sub> -4'11 <sup>1</sup> / <sub>16</sub>

#### **Further installation examples**

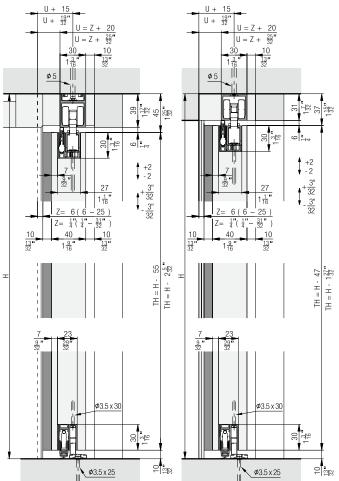


#### Pocket side view, assembly set

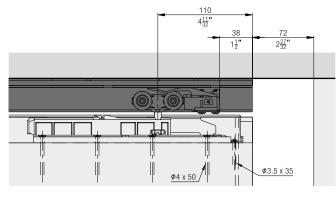

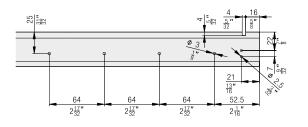





#### Details of end post at lock side




#### Assembly set/track installation Pocket

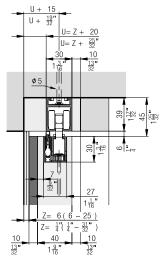





#### Spring stop

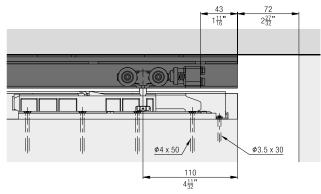


Bottom guide assembly detail



#### Push-to-open with self closing mechanism

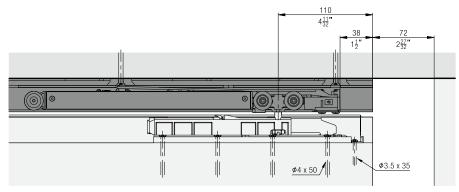

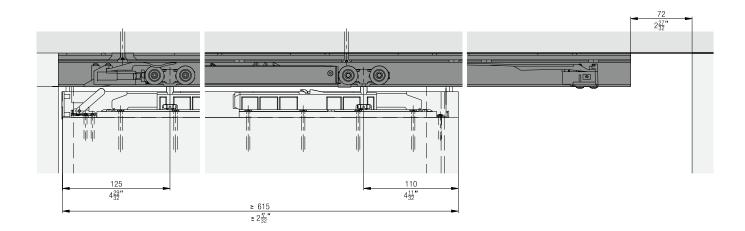

#### **Room-to-room sound attenuation**

All reference values have been measured on the basis of a practical design. The Rw sound attenuation values specify the expected sound attenuation between the two rooms which are influenced by the wall, the system and the choice of door leaf.

Reference values tested with a lightweight construction wall in accordance with James Hardy (type 1 H 31 / Rw 52 dB), size 2.5 x 2.45 m in accordance with DIN EN ISO 10140-2. Clearance 2.0 x 1.0 m. The sound attenuation relates to the entire structure and specifies which sound attenuation can be expected between the two rooms.

Example walls	System	Thickness of door leaf	Type of door leaf	Estimated sound attenuation effect
		:	:	Room to room
				Rw
Wall with minimum acoustic rating of Rw 52 dB	without Hawa Acoustics	39 mm	Single door leaf without sealing system	≈ 18 dB
	Hawa Porta 60 HMD Acoustics Hawa Porta 100 HMD Acoustics		Single door leaf, approx. 19 kg/m <sup>2</sup> acoustic rating of Rw 29 dB	≈ 31 dB
Lightweight construction wall with metal stand			Chipboard, approx. 25 kg/m <sup>2</sup> No defined acoustic rating	≈ 30 dB
			Door leaf with medium sound attenuation level approx. 25 kg/m <sup>2</sup> , acoustic rating of Rw 39 dB	≈ 34 dB
	Hawa Junior 100 B Acoustics Hawa Porta 60 HMD Acoustics Hawa Porta 100 HMD Acoustics		Single door leaf, approx. 20 kg/m <sup>2</sup> acoustic rating of Rw 29 dB	≈ 30 dB
Lightweight construction wall with wooden stand		44 mm	Door leaf with medium sound attenuation level approx. 28 kg/m <sup>2</sup> , acoustic rating of Rw 40 dB	≈ 34 dB
	Hawa Junior 100 B Acoustics	50 mm	Door leaf with high sound attenuation level approx. 33 kg/m <sup>2</sup> , acoustic rating of Rw 42 dB	≈ 35 dB
Solid wall Acoustic ratings for wall construction according to manufacturer. The acoustic values may vary if installed in different wall types.	without Hawa Acoustics		Single door leaf without sealing system	≈ 20 dB
	Hawa Porta 60 HMT Pocket Acoustics Hawa Porta 100 HMT Pocket Acoustics	39 mm	Single door leaf, approx. 19 kg/m², acoustic rating of Rw 29 dB	≈ 31 dB
			Door leaf with medium sound attenuation level approx. 25 kg/m <sup>2</sup> , acoustic rating of Rw 39 dB	≈ 37 dB
	Hawa Junior 100 B Pocket Acoustics Hawa Porta 60 HMT Pocket Acoustics Hawa Porta 100 HMT Pocket Acoustics	44 mm	Single door leaf, approx. 20 kg/m <sup>2</sup> acoustic rating of Rw 29 dB	≈ 32 dB
			Door leaf with medium sound attenuation level approx. 28 kg/m <sup>2</sup> , acoustic rating of Rw 40 dB	≈ 39 dB
	Hawa Junior 100 B Pocket Acoustics	50 mm	Door leaf with high sound attenuation level approx. 33 kg/m², acoustic rating of Rw 42 dB	≈ 41 dB



## Visit us online

On **hawa.com/porta-acoustics** you will find all the relevant details about this extremely diverse, efficient sliding solution by Hawa Sliding Solutions. Find your inspiration.

We would be happy to advise you personally. Contact us at info@hawa.com or by phone on +41 44 787 17 17.